


RAYTECH  
DOUBLE-GLASS BIFACIAL MODULE

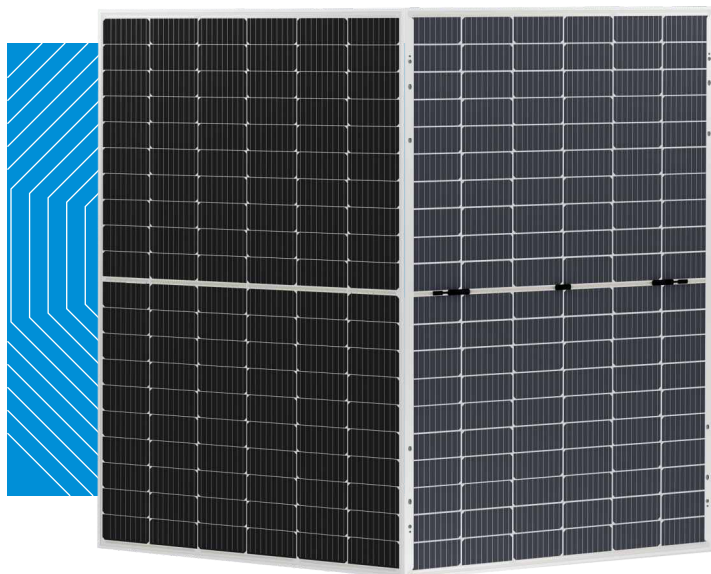

**60LAYOUT**  
P-TYPE/MONO/BIFACIAL

**360-380W**  
POWER OUTPUT

**20.4%**  
MAX. EFFICIENCY



10%  
TRANSPARENCY  
WHITE  
OPAQUE




## COMPANY PROFILE

Ningbo Raytech New Energy Materials Co., Ltd. (referred to as Raytech) is a national high-tech enterprise focusing on "new energy and new materials", integrating R&D, design, manufacturing sales and service. The company's main team has been focusing on the R&D and manufacturing of double-glass solar panels since 2009. its production bases are located in Zhejiang, Jiangsu, and Shandong. The company has an independent technology R&D team, a national key laboratory, and a fully automatic productionline for intelligent manufacturing. The product and quality control standards have reached the industry-leading level.


The company's products have obtained: TuV certification, UL certification, Australian CEC accreditation, Brazil INMETRO certification, the first batch of "Double Glass Leader Certification" in China, ISO9001 international quality system certification, 3C certification and many other authoritative certifications.


Raytech adheres to the business philosophy of "centering on user value and oriented to win-win cooperation", adheres to the principle of "pragmatic, inclusive, refined, and innovative", and carries the vision of "let the golden sunshine restore its natural color" to serve and contribute to the promotion of diversified applications of clean energy.

## PRODUCT FEATURES

-  **Optimized Power Gain**

  - 25% Max. Rear-side Power Gain;
  - Half-Cell Cutting Technology to Lower the Output Power Losses Brought by Shading;
  - Integrates Multiple-Busbar(MBB) Tech, Higher Power Output

 **Working Condition Compatibility & Safety**

  - High Resistance to High Temp., High Humidity, Sand, Acid
  - and Alkali Environment;
  - 5400Pa Snow Loading, 2400Pa Wind Loading;
  - Frames with Light Double Glass to meet customer' s Requirements of Lightness and Safety
-  **Higher-Than-Ever ROI**

  - 1500V System Voltage, Lower BOS Cost;
  - Annual Degradation < 0.45%, 30-year Linear Performance Warranty;

## CERTIFICATION

## CONTACT US



Ningbo Raytech New Energy Materials Co.,Ltd  
Address: Huyong Industry Park, 18 Qiyuan Road, Hangzhou  
Bay New District, Ningbo City, Zhejiang, China  
Tel: +86-400-155-9909  
Website: [www.raytech-energy.com](http://www.raytech-energy.com)  
Email: [sales@raytm.cn](mailto:sales@raytm.cn)




Wechat Public Account

P-type Bifacial Double-Glass Module: 360-380W

ENGINEERING DRAWING

MECHANICAL SPECIFICATIONS

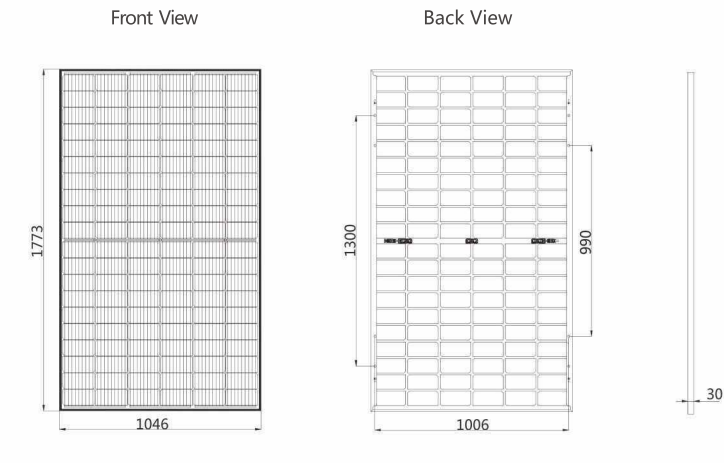

Cell Type	Mono crystalline
Solar Cells	120(6*20)
Module Dimension [mm]	1773*1046*30mm
Weight [Kg]	23.0
Front Glass [mm]	2.0 Semi tempered coated glass
Interlayer	EVA/POE/PVB
Back Glass [mm]	2.0 Semi tempered glass
Junction Box	Ip67 Rated, 3 by-pass diodes
Connector	Multi-Contact MC4(or equivalent)
Frame	30mm Aluminum Frame
Maximum Load Capacity [Pa]	2400(wind load)/5400(snow load)

ELECTRICAL CHARACTERISTICS

		BPD MJ60H(S)-360		BPD MJ60H(S)-365		BPD MJ60H(S)-370		BPD MJ60H(S)-375		BPD MJ60H(S)-380	
		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power at STC [Pmax]	[W]	360	269	365	273	370	277	375	280	380	284
Open Circuit Voltage [Voc]	[V]	40.77	38.1	41.00	38.3	41.27	38.5	41.61	38.9	41.82	39.1
Short Circuit Current [Isc]	[A]	11.22	9.05	11.28	9.10	11.35	9.15	11.43	9.22	11.53	9.30
Voltage at Maximum Power point[Vm]	[V]	33.65	30.9	33.93	31.1	34.20	31.4	34.45	31.6	34.69	31.8
Current at Maximum Power point[Im]	[A]	10.70	8.71	10.76	8.76	10.82	8.81	10.89	8.87	10.95	8.92
Power Tolerance	[%]	0~+3%									
Module Efficiency	[%]	19.4		19.6		19.9		20.2		20.4	

STC: Air Mass AM1.5,Ir-radiance 1000W/m² Cell temperature 25°C. NMOT: Air Mass AM1.5, Ir-radiance 800W/m² Ambient tempera-ture 20°C, wind speed 1m/s.

DOUBLE SIDES POWER OUTPUT ( BACK GAIN )

5%	Maximum Power	[W]	378	383	389	394	399
10%	Maximum Power	[W]	396	402	407	413	418
15%	Maximum Power	[W]	414	420	426	431	437
20%	Maximum Power	[W]	432	438	444	450	456

Bifaciality=75±5%

WORKING CONDITIONS

TEMPERATURE COEFFICIENTS

Maximum System Voltage(With S)	[V]	1000 DC(IEC)
Maximum System Voltage(Without S)	[V]	1500 DC(IEC)
Operating Temperature	[°C]	-40~+85
Nominal Operating Cell Temperature	[°C]	45±3
Maximum rated current	[A]	20

Temperature Coefficient of Pmax	[%/°C]	-0.42
Temperature Coefficient of Voc	[%/°C]	-0.33
Temperature Coefficient of Isc	[%/°C]	0.04

PACKAGE CONFIGURATION	
Per box 35 pieces	40" HQ 910 pieces

ELECTRICAL CURVES

LINEAR PERFORMANCE WARRANTY

